

# European Test Standards for Noise Barriers and their Relevance to New Zealand



Giles Parker

Managing Director, Sound Barrier Solutions Ltd, Market Harborough, United Kingdom

*This paper was previously presented at the 21st Biennial ASNZ Conference, Wellington, NZ*

## Abstract

Revisions to the Specification and Acoustic Test Standards for Noise Barriers for use on European Highways have formally been approved and were due for publication in 2013/14. These proposed changes are examined in this paper. Changes include: 1) Defining higher categories for the specification of acoustic performance for tall barriers both in terms of sound absorption and airborne sound insulation, 2) Requiring outdoor noise testing of all barriers under direct sound field conditions instead of the classical indoor laboratory test regime, 3) The potential use of in situ acoustic testing of barrier durability as a tool for barrier maintenance and asset management. This paper also considers how these revised standards may also be of use to the NZ Noise Barrier Industry and the effective future use of barriers on the NZ state highway network.

## NOISE BARRIER SPECIFICATION STANDARDS

This paper concentrates on recent proposed improvements to the European specification standards for the acoustic performance of highway noise barriers for the duration of their working life. These improvements respond to the need for acoustically effective, durable, low-maintenance systems as well as taking into account the growing need for the higher acoustic performance of products both in terms of sound absorption and airborne sound insulation.

This paper in part provides an update to the development and implementation of these standards.

## VALUE MANAGEMENT

In the current European economic climate where the construction of new highways is deemed harder to justify, the need to maintain the integrity of existing assets on highways is becoming all the more important. Older existing noise barriers, though of a lower specification, are considered primary assets and often require repair, retro-fitting, or in many cases a complete upgrade replacement.

In the UK particularly, any closure of busy operating motorways for routine maintenance is becoming a very costly procedure. The cost impact of lane closures is further compounded in the UK by its impact on the factor Journey Time Reliability or JTR. This is roughly defined as a cost that is set against the predicted increase in journey time due to motorway maintenance work.

It is therefore a priority that the design specification of any replacement barrier system is high performing, durable and as close to zero-maintenance as possible so as to keep the number of maintenance visits for routine repair over the working life of the barrier to a minimum. This in turn keeps the whole life cost of the barrier scheme low.

Recent proposed improvements to existing standards allow for higher noise barrier acoustic performances to be specified at the

design stage and also allow for the in-situ assessment of acoustic performance. This enables the value of the barrier-asset to be managed over its complete working life.

## EUROPEAN STANDARDS FOR ACOUSTIC PERFORMANCE

Across the continent of Europe highways noise has been dealt with as an environmental problem that requires environmental solutions. Noise barriers have been used to ensure that communities are protected from vehicle noise. In contrast, historically, the UK's policy had been to offer non-environmental "solutions" such as secondary double-glazing or even compensation to residents. Neither of these options solves the problem and are thus being rejected in favour of noise barrier and low noise road surfacing.

As a result the need has grown for Europe to have an agreed set of noise barrier design specifications based on certified laboratory tested performance to ensure that effective long-lasting barriers are built that significantly reduce noise levels and public complaints.

What has followed over the last fifteen years is the emergence of new European EN performance standards for highway noise barriers to serve as the backbone for noise barrier specification and to help create a fair market for barrier products across the continent.

## EN 14388 (2005): SPECIFICATIONS

All the current EN standards for highways noise barriers were grouped together under the umbrella standard EN 14388 (2005) – Road Traffic Noise Reducing Devices - Specifications.

This standard covers acoustic, non-acoustic and long term performance, but not aspects such as resistance to vandalism or visual appearance. For product conformity, that is for a noise barrier to be considered for the European highways market this standard required that the barrier product would need to have been assessed and categorised in accordance with the required

parts of EN 1793 for acoustic performance and the required parts of EN 1794 for non-acoustic performance (mechanical, structural, environmental and safety).

### Proposed Changes to EN 14388

With the emergence of new durability standards for noise barriers, the manufacturer will now be required to declare his product acoustic performance in accordance with EN 14389-1, and also declare the working life of his product with regard to non-acoustic parameters in accordance with EN 14389-2.

### EN 1793: Acoustic Performance – Prior to Changes

EN 1793 groups the family of noise barrier standards dealing with intrinsic acoustic performance. These are all product performance tests. Some are internal laboratory tests based in classical reverberation test chambers. Others are in-situ test methods for outdoor test beds or for application of in situ barrier environments. In 2010, prior to any proposed changes the list of acoustic standards was as follows:

EN 1793-1: (1998) Road traffic noise reducing devices: Test method for determining the acoustic performance – Part 1: Intrinsic characteristics of Sound Absorption.

EN 1793-2: (1998) Road traffic noise reducing devices: Test method for determining the acoustic performance – Part 2: Intrinsic characteristics of Airborne Sound Insulation.

EN 1793-3: (1997) Road traffic noise reducing devices: Test method for determining the acoustic performance – Part 3: Normalised traffic noise spectrum.

CEN/TS 1793-4: Road traffic noise reducing devices: Test method for determining the acoustic performance – Part 4: In situ values of diffraction. This is currently a TS or test standard.

CEN/TS 1793-5: Road traffic noise reducing devices: Test method for determining the acoustic performance – Part 5: In situ values of sound reflection and airborne sound insulation.

EN 14389-1(2007): Road traffic noise reducing devices: Procedures for assessing long term performance: Acoustical characteristics. This is now a published standard.

## PROPOSED MODIFICATIONS TO THE ACOUSTIC STANDARDS

Standards are always subject to periodic change for improvement. Any changes detailed below are considered improvements

but are at present proposals awaiting full agreement of all the member states. They will then be accepted as full replacements to the existing standards.

### Primary Changes to EN 1793-1

EN 1793-1 provides a test method to categorize the sound absorptive performance of a noise barrier as a single number rating. Currently these categories range A0 to A4 covering a  $DL_{\alpha}$  range from Not determined to > 11dB.

It is acknowledged that under diffuse sound field conditions for high-sided barriers, tunnels and covers, high sound absorption levels may be required. The new draft standard adds a higher category A5 for  $DL_{\alpha}$  values > 15dB.

This would give the revised categories of absorptive performance as follows:

**Table 1**  
Categories of Absorptive Performance

Category	$DL_{\alpha}$ dB
A0	Not determined
A1	$DL_{\alpha} < 4$
A2	4 to 7
A3	8 to 11
A4	12 to 15
A5	> 15

Source: prEN 1793-1 (2011)

prEN denotes that this version is currently a working document awaiting full approval as a revised standard.

### Primary Changes to EN 1793-2

EN 1793-2 utilises the test facility described in EN ISO 140-3. Because of the reverberant nature of the laboratory it is proposed to limit the scope of standard to diffuse sound field conditions only. The title of the standard would be changed to Road traffic noise reducing devices: Test method for determining the acoustic performance – Part 2: Intrinsic characteristics of airborne sound insulation under diffuse field conditions.

The Scope would clarify that this standard is not intended for



Nigel Lloyd, phone 04 388 3407, mobile 0274 480 282, fax 04 388 3507, nigel@acousafe.co.nz

noise reducing devices that are to be installed on highways under normal conditions which are almost always non-reverberant. This would greatly reduce the use of this standard in favour of the new standard prEN 1793-6 which is considered a more representative method for direct sound field conditions.

EN 1793-2 provides a test method to categorize the airborne sound insulation performance of a noise barrier as a single number rating. Currently these categories range from B0 to B3 covering a DLR range from Not determined to > 24dB.

It is acknowledged that for high-sided barriers, high airborne sound insulation levels may be required. The new draft standard adds a higher category B4 for DLR values > 34dB.

This would give the revised categories of airborne sound insulation performance as follows:

**Table 2**  
Categories of Airborne Sound Insulation

Category	DL <sub>R</sub> dB
B0	Not determined
B1	DL <sub>R</sub> < 15
B2	15 to 24
B3	25 to 34
B4	> 34

Source: prEN 1793-2 (2011)

prEN denotes that this version is currently a working document awaiting full approval as a revised standard.

### Defining Reverberant Conditions

For the purpose of this European standard, reverberant conditions are defined based on the geometric envelope, across the road formed by the barriers, trench sides or buildings but excluding the road surface. Conditions are defined as reverberant when the percentage of open space in the envelope is less than or equal to 25%.

### Primary Changes to EN/TS 1793-5

CEN/TS 1793-5 in its previous form gave a test method for determining in situ values of both sound reflection and air-borne sound insulation. The revised methodology for airborne sound insulation defined in EN 1793-6 supersedes the equivalent section in CEN/TS 1793-5 however the CEN/TS is retained as an interim method for determining in situ sound reflection performance.

### EN 1793-6:2011

#### EN 1793-6 is intended for the following applications:

- Determining the airborne sound insulation single number rating of a noise barrier to be installed along roads, to be measured either in situ or under outdoor laboratory conditions.
- Determining the airborne sound insulation of a noise barrier in actual use.

- Comparing the design specifications with actual performance data after the completion of the construction work.
- Verifying the long term performance of a noise barrier with a repeated application of the method. This makes it a useful asset management tool.
- Designing new products, including the formulation of installation manuals.

EN 1793-6 is not intended for determining the airborne sound insulation of a noise barrier to be installed in reverberant conditions as defined above e.g.: tunnels, deep trenches or covers. The scope of prEN 1793-2 would cover this.

EN 1793-6 would provide new categories of airborne sound insulation performance: DLSI. Again these would be presented as a single number rating. Since these are determined by a different method and under different conditions, the values would not be numerically the same as those obtained using prEN 1793-2 however it is intended that they are coincident with them.

The values are as follows:

**Table 3**  
Categories of Airborne Sound Insulation

Category	DL <sub>SI</sub> dB
D0	Not determined
D1	DL <sub>SI</sub> < 16
D2	16 to 27
D3	28 to 36
D4	> 36

Source: EN 1793-6 (2011)

### Long Term Performance

The acoustic characteristics of a noise barrier can deteriorate significantly over the duration of its working life if it is not installed or maintained in accordance with the manufacturer's recommendations or if the materials are not appropriate for the roadside environment. EN 14389-1 (2007) defines the means of evaluating their acoustic durability.

The sound absorption is characterised by the reflection index DLRI as defined by CEN/TS 1793-5. The airborne sound insulation is characterised by the airborne sound insulation index DLSI as defined by EN 1793-6.

The standard currently only references CEN/TS 1793-5. This will be updated to show the change to EN 1793-6.

EN 1793-6 now provides an agreed method for the in situ acoustic testing of barrier durability with regard to airborne sound insulation.

## ASSESSING IN SITU PERFORMANCE OF UK TIMBER BARRIERS USING EN 1793-6

The TRL Published Project Report PPR490 provides an assessment of the acoustic durability of UK timber noise barriers utilising the methodology of EN 1793-6.

With the majority of historical UK noise barriers being of low quality construction typically of single leaf timber fencing, the volume of installations provided useful information on the expected longevity of such designs.

Overall, the results would suggest that for single-leaf reflective barriers, any degradation in acoustic performance occurs during the first 5 years after construction. Depending upon the initial performance, this decrease appears to be of the order of 4-7 dB.

Based on the required performance of many of the barriers, this often renders the barrier almost obsolete after a very short time.

It is recommended in the New Zealand market that more durable barrier designs are specified and installed either in terms of higher quality engineered products, the use of more robust materials or, as in the UK, the use of double leaf timber barrier systems.

Acoustic consultant specifiers should factor in the impact of whole life costs when specifying noise barrier types and should avoid products that might require whole-scale maintenance or even complete replacement during the design life of a scheme.

## FURTHER SPECIFICATION DETAILS FOR TIMBER BARRIERS IN THE UK

Having utilised the European Standards in EN 14388 (2005) to produce the most robust contract specification problems can still arise at the installation phase. In the UK this has especially been the case for timber-based barriers.

The need for comprehensive site supervision during the barrier build process has been essential to ensure the built barrier matches the specified barrier. Practical aspects relating to the installation process need to be highlighted within the design specification. Experientially, many of the aspects of workmanship highlighted in this section relate only to timber based barriers. However some of them apply to non-timber

schemes also.

## Acoustic Tightness

The weakest points of a barrier system's performance are the joints or posts fixings. Noise leakage at posts can render a barrier virtually useless and yet it is a simple to avoid both at the design and installation stage.

It is essential to ensure that the interface between the barrier and the ground is permanently sealed with no potential of gaps opening up in the future.

To ensure that this is the case, it is recommended that the barrier is constructed with a gravel board embedded to a depth of at least 100mm below the ground surface or the barrier itself rests on a concrete sill embedded to a depth of 100mm. The gravel board itself shall be constructed from material resistant to rotting in contact with the ground


Where the barrier is designed to sit onto a concrete sill, the self-weight of the bottom panel should provide a sufficient seal. Supporting a timber barrier panel simply on the post fixings without a solid base is insufficient as it could result in the panel deforming substantially over its working life. It could also result in gaps forming under the barrier panel itself.

## Traceability of Timber Sources

Sustainability is a priority for the UK Highways Agency. It is essential to ensure that the barrier manufacturer can fully demonstrate that he has a system for providing timber that has originated from a sustainable source, and also that he is following that system for the given project.

The specification may read as follows:

The contractor shall demonstrate compliance with the specification requirement that timber shall be supplied from legal and managed sustainable sources by providing suitable records of the supply chain for the timber. The responsibility for compliance is with the appointed contractor and not just with their timber supplier.

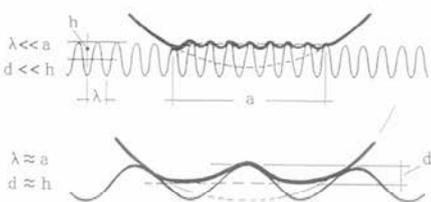

**Malcolm Hunt Associates**  
Noise and Environmental Consultants

www.noise.co.nz - email mha@noise.co.nz

sound weighted standardized impact sound pressure levels structure born sound low frequency noise octave band time weighting sabin speech intelligibility noise reduction engineering sound level environment spectrum resource management SIL ambient sound insulation vibration rumble sound level meter noise map silencer emission speaker amenity value reverberation time noise reduction coefficient Dntw speech transmission index dBA frequency band noise Hertz or Hz far field octave airborne sound impact sound pressure level immission plane wave SEL line source random incidence sound reduction index, R best practical option frequency spectrum noise exchange rate logarithm live room limiter calibration room criterion curves habitat structure sound power sound pressure level hiss free field Ctr articulation class ambience Bel acoustics environment assessment structural analysis apparent sound reduction index resonance natural frequency flow kinetic measurement prediction signal processing threshold shift shadow zone transducer wavelength narrow band overtone reflection percentile level impedance directivity fresnel number harmonic echo ambient active noise control attenuation coverage angle coincidence hearing point abatement temperature diffusion indoors reflections concave node anti-node wind

The contractor shall provide evidence of full compliance with this requirement. Such documentary evidence shall be supplied by the contractor to the over-seeing organisation with the contractor's tender submission, prior to appointment and further substantiation relating specifically to the timber and wood actually used shall be supplied by the contractor to the overseeing organisation during the execution of the Works.

Any timber and wood contained in the products supplied or used, whether used for permanent or temporary works, not complying with the requirements of this clause shall be removed from the works at the insistence of the overseeing organisation and replaced with material complying with this clause at the expense of the contractor.

In the UK, prior to the contract being let, the contractor could provide certification detailing BM TRADA Chain of Custody registration to ensure that the timber they normally use does come from a sustainable source thus demonstrating his ability to comply. It is equally important for the customer to examine the documents that come with the actual timber used for the project to ensure that it has indeed come from that source.

### Cutting of Timber On-site

Correctly pretreated timber will last. Whilst some cutting and drilling of timber on site is unavoidable, wholesale cutting during in-situ installation should be avoided. Furthermore, it is essential that procedures for treatment re-coating of cut surfaces is fully adhered to. Again, this process should be supervised since most of the timber surfaces are hidden in the final barrier.

### Panel Storage On-site

Pre-built modular panels do give an acoustic benefit. They are normally far tighter in construction than panels built in situ. However, it is essential that pre-built panels are correctly stored

on site. Better still, if possible that site storage of panels is avoided and that they arrive directly for installation.

The contractor should ensure that all panels and materials stored on site or at a designated compound are held or supported in such a way as to prevent warping, damage or deterioration. Finished products such as modular panels that need to be stored on site or in a compound should be supported and protected to prevent damage or deterioration prior to installation.

Again, it is recommended that any panels found to be damaged in storage should be removed and replaced at the contractor's expense. This does require a description and examination of how panels are stored on site.


### Gates and Openings

Where access is required through a barrier it is vital to ensure that the gate construction is to the same quality and similar acoustic performance as the barrier itself and that there is no leakage through gaps around the gate frame. Often for timber barriers the gate design is an after thought and the resulting quality is very low.

An alternative and preferable solution would be to create an absorptive overlap walkway in the barrier design for the point of access. Designed correctly, this wouldn't even require a gate. Working like a physical silencer, a walkway through the barrier would be created with the inner faces being absorptive. Most of the noise from the road would be trapped in the walkway zone and the overall barrier acoustic integrity is maintained.

### Drainage of Mineral Wool

Common to mineral wool based absorptive barriers, is the need to include a drainage path for moisture. Both in timber and metal based absorptive barriers, the wool mattress is tightly sandwiched in the barrier cassette. After a while, rain water

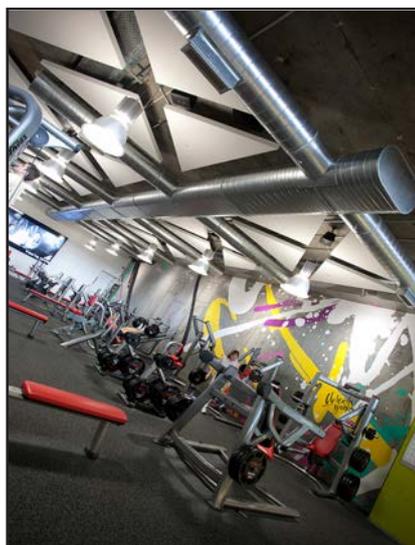

## 100% Made in NZ Acoustic ceiling & wall panels.

- **Sound absorbers**
- **Attenuators**
- **Reflectors**
- **Fabric panels**
- **Hygiene panels**
- **Abuse resistant**
- **Cloud panels**

Laminated composite panels, specialty finishes & facings, custom designs, recycle and renew service.

### Imported products:

- Danoline™ perforated plasterboard linings and suspended ceiling panels
- Atkar™ perforated fibre cement, ply and MDF
- Sonacoustic™ plasters
- Zeus™ rockwool panels



**asona**

### Asona Limited

7 Cain Road,  
Penrose,  
Auckland, NZ

**Tel: 09 525 6575**

**Fax: 09 525 6579**

**Email: info@asona.co.nz**

**www.asona.co.nz**

© Copyright Asona Ltd 2011

# Listen up!

See the Jepsen Acoustics & Electronics Permanent Noise Monitor for recording and monitoring noise and weather data online in **REAL TIME**.

View what's happening online as it happens on-site anywhere in the world.

Check out our site to view the noise and weather as it is right now!

[www.noiseandweather.co.nz](http://www.noiseandweather.co.nz)

Jepsen  
PERMANENT NOISE MONITOR

Jepsen Acoustics & Electronics Ltd  
22 Domain Street  
Palmerston North  
P 06 357 7539  
E [jael@ihug.co.nz](mailto:jael@ihug.co.nz)



#### CONTINUOUSLY TRACKS IN REAL TIME:

LAeq, LA10, LA50, LA90, LA95, LAmin, LAmax, 1/3 Octave, Rainfall, Wind direction and velocity, Temperature

- COMPETITIVELY PRICED
- DESIGNED AND BUILT IN NZ FOR TOUGH CONDITIONS
- SELF CONTAINED WITH MAINS OR SOLAR POWER



Architectural Acoustics

Noise & Vibration Control

Environmental Acoustics



[www.earcon.co.nz](http://www.earcon.co.nz)

saturates the mattress and it either slumps in the frame or disintegrates. Since it is internal, this normally passes unnoticed but the barrier is no longer functioning.

This is best avoided in the design of the barrier panel itself by supporting the mineral wool mattress away from the walls of the panel cassette (for example by supporting it in an internal frame). The wool can then drain naturally and saturation is avoided.

## COMPLIMENTING THE NZTA STATE HIGHWAY NOISE BARRIER DESIGN GUIDE

Whilst the noise barrier market will differ from Europe to New Zealand some aspects of the updated European standards may compliment the NZTA State Highway Noise Barrier Design Guide:

### CE Marking

EN 14388 as the specification standard for highways noise barriers in Europe defines a mark of performance quality or CE Mark by which noise barrier products can be judged professionally.

Section 5.5 Acoustics Specifications of the Design Guide predicts the likely required increased use of proprietary noise barrier systems, such as those in common use internationally. The CE Mark provides a robust means of sifting the quality cost effective systems that will benefit New Zealand going forward.

### EN 1793-6 for Airborne Sound Insulation

EN 1793-6 is already an accepted reliable method for rating and assessing the airborne sound insulation of noise barriers. Being an in situ method it is also a more appropriate method for intrinsic assessment for highways noise barriers than the existing EN 1793-2.

It could become the adopted method of choice for highways noise barriers in New Zealand such that manufacturers are required to test to it and consultants to include it in specifications.

As an in-situ test method it is well suited to manufacturers since it is straight forward for them to set up a 'test bed' arrangement at their plant. This allows for research and development to be done at their base.

### EN 1793-6 for Asset Assessment

Should New Zealand choose to adopt EN 1793-6 as a test method for new barrier schemes, it further allows for on-going periodic assessment to ensure that a barrier is still performing and is fit for purpose. This helps determine and clearly validate when it might require retro-fitting or even replacement.

### EN 14389-1 for Acoustic Durability

EN 14389-1 provides an assessment method for durability based on variation of the airborne sound insulation index DLSI as defined by EN 1793-6 with time. With performance values declared by the manufacturer over 5, 10, 15 and 20 years, periodic measurements to EN 1793-6 would enable the NZTA to check on a barrier's actual ongoing performance against declared product data.

## REFERENCES

- [1] Giles Parker, "Effective Noise Barrier Design and Specification" (Proceedings from ACOUSTICS 2006, Christchurch New Zealand)
- [2] Phil Morgan, TRL, PPR490 "The acoustic durability of timber noise barrier on England's strategic road network"
- [3] NZTA State Highway Noise Barrier Design Guide Version 1.0/August 2010. ¶



[www.golder.co.nz](http://www.golder.co.nz)

- ★ Environmental noise assessments
- ★ Workplace noise investigations
- ★ Environmental audits
- ★ Building noise control
- ★ Assessment of environmental effects
- ★ Resource consent management

*Offices in Auckland, Tauranga, Nelson, Christchurch and Dunedin*

For more information contact Golder Associates (NZ) Ltd tel +64 9 486 8068 fax +64 9 486 8072  
PO Box 33849 Takapuna, Auckland, NEW ZEALAND web [www.golder.co.nz](http://www.golder.co.nz) email [jcawley@golder.co.nz](mailto:jcawley@golder.co.nz)